




RTX-64F-FAL

Dakota Digital RTX Instrument Installation For 1964-'65 Ford Falcon, Ranchero, 64½-'65 Mustang Base Model

Your new RTX-64F-FAL kit includes:

RTX Display



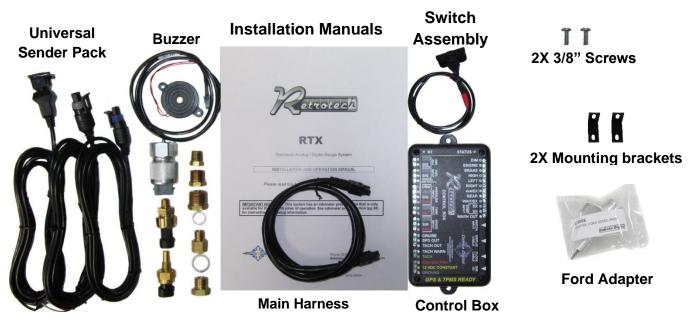

Installation

1. Remove the stock gauge cluster from the dash and retain the factory hardware for reassembly.



2. Separate the bezel from the rest of the cluster by removing the seven screws on the backside. Retain six of these screws for reassembly.



3. With the bare bezel lying face down, fit the RTX system into place and secure it to the bezel using six original screws from disassembly.



4. Secure the angled mounting brackets to the bottom side of the RTX system using the supplied 3/8" screws while aligning the bracket to the bezel mounting hole. The brackets have a slot at each end for proper adjustment; the end with the shorter slot gets mounted to the RTX system.


End of bracket with shorter slot mounts to the RTX system using supplied 3/8" screw



Both brackets mounted to the bottom side of the RTX system



5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system.

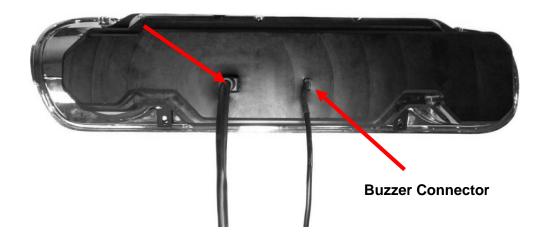

6. Re-install the gauge cluster to the dash using the factory hardware while rechecking mounting bracket alignment. Refer to the main manual for wiring instructions to complete the RTX installation.



▲WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2020 - Dakota Digital